


E9 Troubleshooting

1 Digital display output

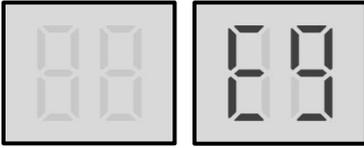


2. Description

- Water flow failure.
- E9 indicates a water flow switch error. When an E9 error occurs 3 times in 60 minutes, a manual system restart is required before the system can resume operation.
- All units stop running.
- Error code is displayed on main PCB and user interface.

3 Possible causes

- The wire circuit is short connected or open.
- Water flow rate is too low.
- Water flow switch is damaged.
- Main PCB is damaged.

4 Procedure

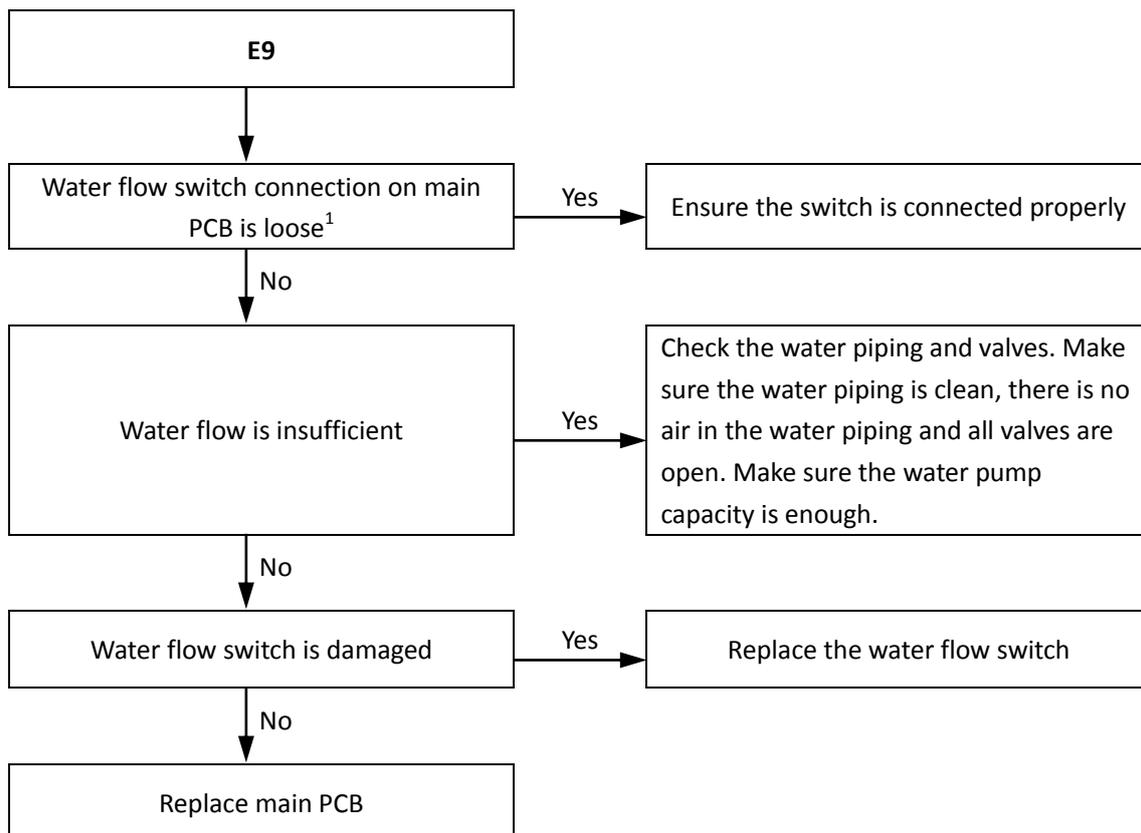

Notes:

1. For 30kW and 60kW units, water flow switch connection is port CN8 on the main PCB.