


# Midea Blanc 2.0

## FICHA PRODUCTO


 RG10A(B2S)/BGEF  
Control de serie



Producto certificado por:

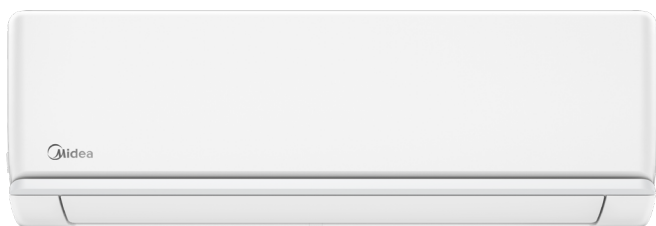

## CARACTERÍSTICAS

| Modelo                          | BLANC 2.0 26(09)N8    | BLANC 2.0 35(12)N8     | BLANC 2.0 52(18)N8 | BLANC 2.0 71(24)N8 |
|---------------------------------|-----------------------|------------------------|--------------------|--------------------|
| Capacidad frigorífica           | 2,64 kW               | 3,52 kW                | 5,28 kW            | 7,03 kW            |
| Consumo frío                    | 799 W                 | 1.238 W                | 1.550 W            | 2.420 W            |
| Capacidad calorífica            | 2,93 kW               | 3,81 kW                | 5,57 kW            | 7,33 kW            |
| Consumo calor                   | 813 W                 | 1.018 W                | 1.630 W            | 2.130 W            |
| Clasificación ErP frío/calor    | A++ / A+              | A++ / A+               | A++ / A+           | A++ / A+           |
| Caudal de aire (int.)           | 255/325/451 m³/h      | 454/493/575 m³/h       | 500/600/800 m³/h   | 610/770/1.090 m³/h |
| Presión sonora (int.)           | 21/25,5/29/37 dB(A)   | 21//25/31,5/37,5 dB(A) | 31/37/41 dB(A)     | 34,50/37/46 dB(A)  |
| Caudal de aire (ext.)           | 1.750 m³/h            | 1.800 m³/h             | 2.100 m³/h         | 3.500 m³/h         |
| Presión sonora (ext.)           | 55,50 dB(A)           | 55,5 dB(A)             | 57 dB(A)           | 60 dB(A)           |
| Alimentación                    | 220-240 V / 1 / 50 Hz |                        |                    |                    |
| Cableado alimentación (ext.)    | (2+T)x1,50 mm²        | (2+T)x1,50 mm²         | (2+T)x1,50 mm²     | (2+T)x2,50 mm²     |
| Cableado comunicación           | (4+T)x1,50 mm²        | (4+T)x1,50 mm²         | (4+T)x1,50 mm²     | (4+T)x2,50 mm²     |
| Tuberías frigoríficas           | Ø1/4" / Ø3/8"         | Ø1/4" / Ø3/8"          | Ø1/4" / Ø1/2"      | Ø3/8" / Ø5/8"      |
| Carga fábrica / Carga adicional | 0,55 kg / 0,012 kg    | 0,55 kg / 0,012 kg     | 1,10 kg / 0,012 kg | 1,45 kg / 0,024 kg |
| Longitud máx. tuberías          | 25 m                  | 25 m                   | 30 m               | 50 m               |
| Desnivel máx.                   | 10 m                  | 10 m                   | 20 m               | 25 m               |


## ESQUEMA CONEXIONES

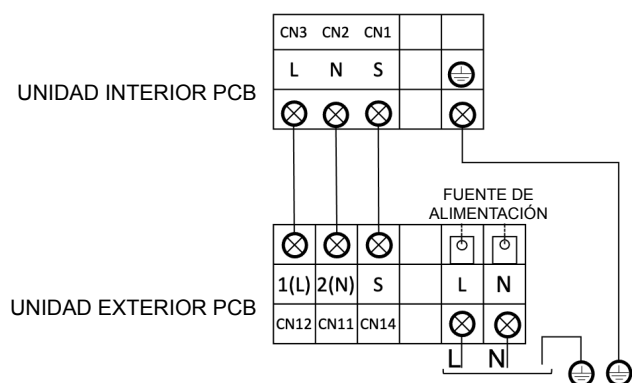

NOTAS:  
 (1) Los datos y especificaciones presentes en esta ficha pueden variar sin previo aviso.  
 (2) Las imágenes de esta ficha son de carácter orientativo, pudiendo ser diferentes a la máquina final.


## DIMENSIONES Y PESO UNIDAD INTERIOR

| Modelo             | Peso     | A        | B      | C      |
|--------------------|----------|----------|--------|--------|
| <b>MAG2-09N8-1</b> | 7,8 kg   | 726 mm   | 291 mm | 210 mm |
| <b>MAG2-12N8-1</b> | 8,4 kg   | 835 mm   | 295 mm | 208 mm |
| <b>MAG2-18N8-1</b> | 11,20 kg | 969 mm   | 320 mm | 241 mm |
| <b>MAG2-24N8-1</b> | 13,60 kg | 1.083 mm | 336 mm | 244 mm |

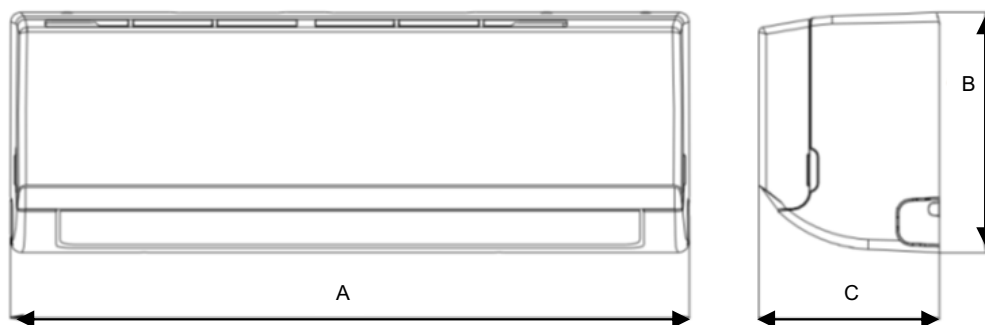

## DIMENSIONES Y PESO UNIDAD EXTERIOR

| Modelo              | Peso     | Ancho  | Alto   | Fondo  |
|---------------------|----------|--------|--------|--------|
| <b>MOM-09N8D0-1</b> | 23,50 kg | 720 mm | 495 mm | 270 mm |
| <b>MOM-12N8D0-1</b> | 23,50 kg | 720 mm | 495 mm | 270 mm |
| <b>MOM-18N8D0-1</b> | 33,50 kg | 805 mm | 554 mm | 330 mm |
| <b>MOM-24N8D0-1</b> | 43,90 kg | 890 mm | 673 mm | 342 mm |

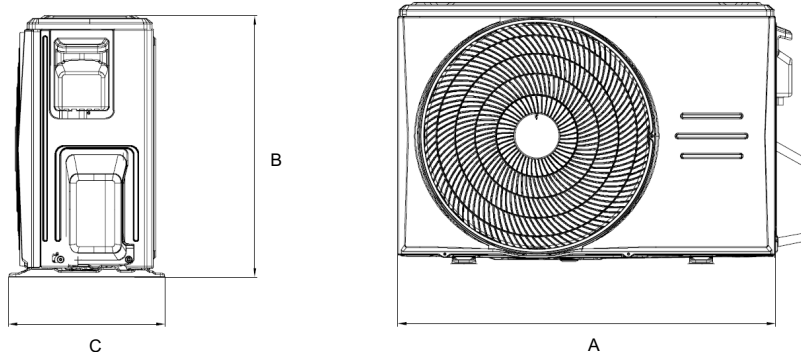

## INSTALACIÓN

